

Table of Contents Introduction 04 **Smart Lighting** 06 Lighting 07 Lighting 11 Commercial 12 13 Luminaries Linear 13 Panels & Troffers 14 Highbays 15 Downlights 16 Wall Packs 18 19 Lamps 19 PL Lamps 20 Corn Bulbs T8 Lamps 20 T5 Lamps 22

Why Choose AM Conservation?

Achieve Your Goals with Us

AM Conservation is your trusted resource for energy- and water-efficient products. From smart thermostats to LED light bulbs, showerheads, faucet aerators and advanced powerstrips, our products leverage innovative technology to maximize savings. We guarantee quality with product certifications from ENERGY STAR®, DLC and WaterSense®.

As a manufacturer and distributor with over 30 years of merchandising, online product sales, program implementation and logistics experience in the energy and water efficiency industry, we are uniquely qualified to provide reliable products and services.



Experience

We have been in business for more than 30 years, which means we've got the experience and market expertise to achieve your unique goals.




Fast & Safe Delivery

Our industry-leading logistics network follows extensive best practices, including maintaining ample inventory on-hand, to fulfill orders in a seamless and timely manner.



Reliable Pricing

Our manufacturer-direct product pricing builds value for your business and your customers.

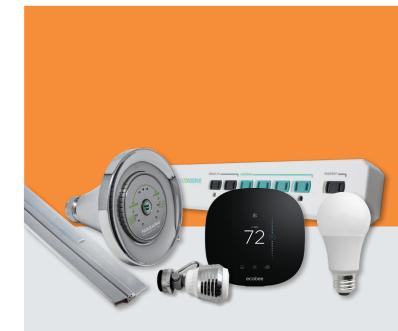



Top-Level Support

We provide concierge-level customer service with after-sale support.



Efficient Products

We offer products that are customengineered and hand-picked to provide superior performance at an accessible price point.

PremiumProducts & Services

AM Conservation's robust product line is ideal for a variety of clients, including utilities, municipalities, program implementers, contractors, distributors, retailers, non-profit agencies and more.





Rapid & Reliable Fulfillment

We ship directly from our warehouse to your job site or store within 1-2 days of receipt of order.




Unparalleled Value

Our unique, competitively priced product mix builds value for your business and your customers.



Discount Opportunities


We offer the ability to order in bulk, saving time and providing cost savings to both you and your customers.

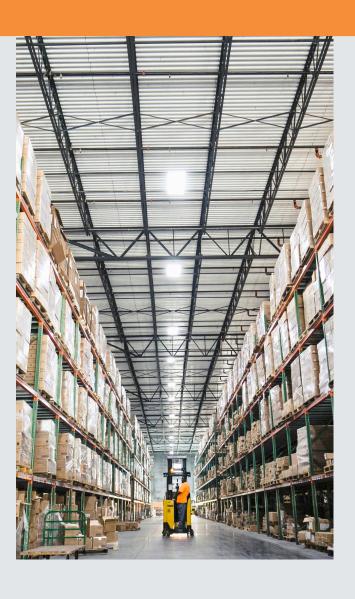

Smart Lighting Products

Stay Connected and In Control

Wi-fi and voice-compatible solutions that allow your customers to adjust their smart devices from anywhere.

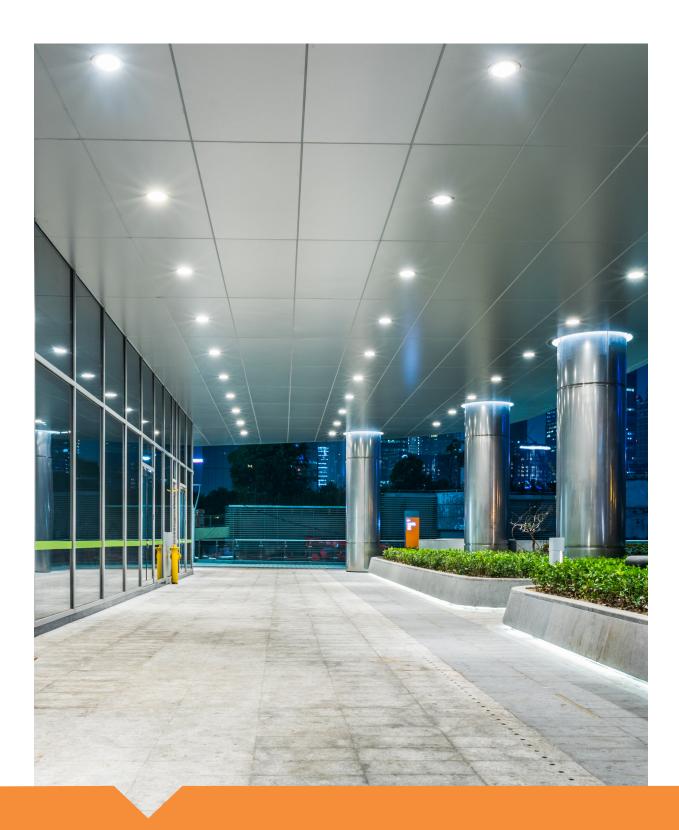

Smart Lighting



Simply Conserve® Wi-Fi & BLE-Enabled Smart Recessed Downlight Retrofit

Illuminate a world of possibilities with Simply Conserve's smart downlight retrofit. Change brightness and color based on your daily activity. Bring them to life by naming, grouping and sharing your smart down lights. With the touch of a finger or the ease of voice control, you can monitor and adjust your lights from anywhere.















MODEL NUMBER	NOMINAL SIZE	NOMINAL WATTS	VOLTAGE	LUMENS	ССТ	CRI	DIMMING	CASE QTY.	WARRANTY
L12DL5/6-CCT-RGB- WiFi-BLE	6.3" x 2.8"	12W	120V	950	2200-6500K	<u>≥</u> 80	Yes	30	5 year

Smart Lighting

Partner Brands



Stay connected and in control.


Adjust from anywhere for smart control.

We offer smart devices from our well known partner brands. Smart home devices provide many benefits for consumers. The devices we offer focus on increasing energy efficiency in residences and businesses.

Providing greater control of energy use benefits both the consumer and the energy service provider. The

easy automation of things such as temperature settings and lighting increase energy efficiency.


Many of our smart home devices also provide insights into energy use that can help consumers become more mindful of how they are using energy and encourage them to save energy so they can save money.

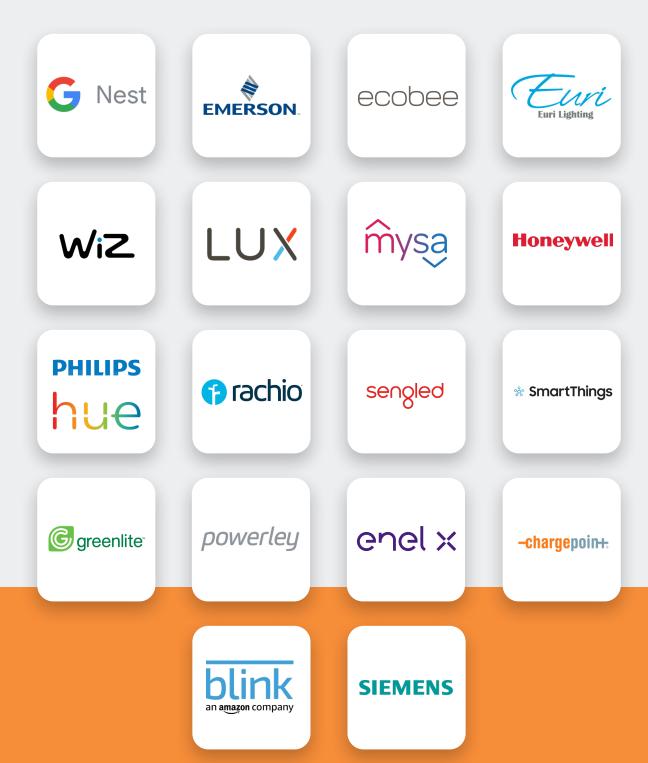

High-Quality Lighting

Lighting For Offices and Commercial Buildings

AM Conservation offers a wide range of energy-saving lighting options for small business and commercial and industrial businesses for bulk order.

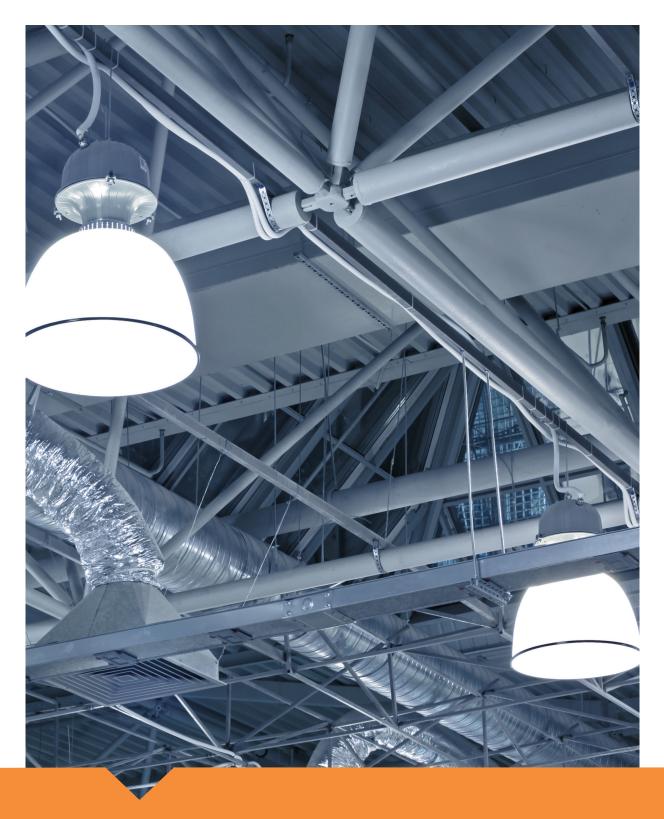

Commercial Lighting

LUMINARIES

Linear

SIMPLY CONSERVE®

Simply Conserve® LED Shop Light

Our LED Shop Light is the ideal solution to illuminate basements, garages, work spaces and more. It offers daylight-white overhead task lighting to maximize productivity, and its shatter-resistant, damp-rated build allows it to function in any space. With powerful lighting optimized for any project, the LED shop light saves energy without sacrificing quality.







MODEL NUMBER	NOMINAL SIZE	NOMINAL WATTS	VOLTAGE	LUMENS	ССТ	CRI	DIMMING	CASE QTY.	WARRANTY
L40SL40L	43.3" x 3.6" x 1.9"	40W	120-277V	4000	4000K	<u>≥</u> 80	No	8	5 year

SIMPLY CONSERVE®

Simply Conserve® Adjustable Strip Light

Simply Conserve's field-adjustable linear strip fixture includes two switches inside the unit which allow for adjustment of the input power, 30W/40W/50W and color temperature 3500K/4000K/5000K. Push-button lens cover releases allow for tool-free access to adjust settings and wire connections. Lens is supported with aircraft cable to prevent the lens from falling. This versatile product is suitable for a variety of applications including retail, offices, warehouses, stairwells, and garages.









MODEL NUMBER	NOMINAL SIZE	NOMINAL WATTS	VOLTAGE	LUMENS	ССТ	CRI	DIMMING	CASE QTY.	WARRANTY
L30/50- STRP-35/50- 4FT-D- ADJ-120/277	48" x 3" x 3.3"	30/40/50W	120-277V	3900/5200/ 6500	35/40/50K	>80	0-10V	6	5 year

Panel & Troffers

SIMPLY CONSERVE®

Simply Conserve® Field-Adjustable Commercial Flat Panel



Our DLC-certified LED flat panels are designed for recessed, surface, or suspended ceiling grid installation, making them an ideal solution for replacing inefficient traditional fluorescent fixtures. They produce an even, bright light suitable for commercial settings including office buildings, schools, hospitals and more. Their minimalist design allows them to integrate seamlessly, offering high-quality, reliable lighting.









MODEL NUMBER	NOMINAL SIZE	NOMINAL WATTS	VOLTAGE	LUMENS	ССТ	CRI	DIMMING	CASE QTY.	WARRANTY
L20/30-FP22-35/50- D-ADJ	2x2	20/25/30	120-277V	2500/3125/ 3750	35/40/50K	≥80	0-10V	4	5 year
L230/40-FP24- 35/50-D-ADJ	2x4	30/35/40	120-277V	3750/4375/ 5000	35/40/50K	<u>></u> 80	0-10V	4	5 year

SIMPLY CONSERVE®

Simply Conserve® Edge-Lit LED Flat Panels The Simply Conserve® Edge Lit LED Panel produces a



The Simply Conserve® Edge-Lit LED Panel produces an even and efficient light, making it the perfect energy-efficient replacement for fluorescent fixtures. The panels are fully dimmable, creating the opportunity for significant savings in commercial and industrial environments including schools, office buildings and hospitals. Facilities are encouraged to utilize utility rebate programs with these DLC-listed models.









MODEL NUMBER	NOMINAL SIZE	NOMINAL WATTS	VOLTAGE	LUMENS	ССТ	CRI	DIMMING	CASE QTY.	WARRANTY
L40FP2240D	2x2	40W	120-277V	4000	4000K	<u>></u> 80	Yes	4	5 year
L40FP2250D	2x2	40W	120-277V	4000	5000K	<u>≥</u> 80	Yes	4	5 year
L50FP2440D	2x4	50W	120-277V	5000	4000K	<u>≥</u> 80	Yes	4	5 year
L50FP2450D	2x4	50W	120-277V	5000	5000K	≥80	Yes	4	5 year

Simply Conserve® LED Troffer

Our DLC-certified LED troffers are designed for installation in T-bar grid or drop-in ceilings. They are the ideal solution for replacing inefficient traditional fluorescent troffers. They produce an even, bright light ideal for commercial settings including office buildings, schools, hospitals and more. Their attractive design allows them to integrate seamlessly into any setting, offering high-quality, reliable lighting.











Intertek

MODEL NUMBER	NOMINAL SIZE	NOMINAL WATTS	VOLTAGE	LUMENS	ССТ	CRI	DIMMING	CASE QTY.	WARRANTY
L35TF2240D	23.78" x 23.78" x 2.75"	35W	120-277V	4375	4000K	<u>≥</u> 80	0-10V	1	5 year
L35TF2250D	23.78" x 23.78" x 2.75"	35W	120-277V	4375	5000K	≥80	0-10V	1	5 year
L34TF2440D	23.78" x 47.75" x 2.75"	34W	120-277V	4250	4000K	≥80	0-10V	1	5 year
L34TF2450D	23.78" x 47.75" x 2.75"	34W	120-277V	4250	5000K	≥80	Yes	1	5 year

High Bays

SIMPIY**C®NSERVE®**

Simply Conserve® LED Linear Highbay

The LED Linear High Bay Series offers leading-edge efficacy and scalability for highceiling applications such as warehouses, distribution centers, manufacturing facilities and big box retailers.











MODEL NUMBER	NOMINAL SIZE	NOMINAL WATTS	VOLTAGE	LUMENS	ССТ	CRI	DIMMING	CASE QTY.	WARRANTY
L135HBL250D	2' x 1'	135W	120-277V	18000	5000K	≥80	No	1	5 year
L174HBL250D	2' x 1'	174W	120-277V	23000	5000K	≥80	No	1	5 year
L22HBL450D	2' x 2'	223W	120-277V	30000	5000K	≥80	No	1	5 year
L210HBL250D	24.8" x 18.9" x 2.2"	210W	120-277V	29000	5000K	≥80	0-10V	6	5 year
HB-MOTION (Sold Separately)								1	



Simply Conserve® LED UFO Highbay

The UFO High Bay is the ideal solution for commercial spaces with high ceilings. Its damp-rated durability is appropriate for illuminating a wide range of spaces, including warehouses, gymnasiums, manufacturing facilities and more. It features minimal glare and optimal performance.









MODEL NUMBER	NOMINAL SIZE	NOMINAL WATTS	VOLTAGE	LUMENS	ССТ	CRI	DIMMING	CASE QTY.	WARRANTY
L130HBU540D	8 5/16" x 8 1/2"	130W	120-277V	18000	5000K	<u>≥</u> 80	No	1	5 year
L170HBU50D	9 7/8" x 8 11/16"	175W	120-277V	24000	5000K	<u>≥</u> 80	No	1	5 year
HB-MOTION (Sold Separately)								1	

Downlights

SIMPLY CONSERVE®

Simply Conserve® LED Recessed Downlight Retrofit



These recessed downlights are the ideal solution for energy-efficient lighting upgrades in new construction or remodeling projects. They seamlessly replace 65-to-75watt incandescent lamps in five- and six-inch recessed downlight fixtures, saving money without sacrificing quality. They're easy to install, suitable for use in damp locations and provide 35,000 hours of maintenance-free operation.







MODEL NUMBER	NOMINAL SIZE	NOMINAL WATTS	VOLTAGE	LUMENS	ССТ	CRI	DIMMING	CASE QTY.	WARRANTY
L13DL5/6AP-27K	6"	13W	120V	900	2700K	<u>≥</u> 80	Yes	12	5 year
L13D- L5/6AP-30K	6"	13W	120V	900	3000K	≥80	Yes	12	5 year
L13D- L5/6AP-40K	6"	13W	120V	900	4000K	≥80	Yes	12	5 year

Simply Conserve® J-Box Integrated Downlight

Simply Conserve's IC-Rated LED Integrated Downlight is available in 6" diameter. It can be easily installed in finished drywall or architectural tile ceilings in a wide variety of commercial and residential applications. The downlights provide more than 78 lumens per watt with a high 80+ CRI for efficient performance and excellent color rendering. The LED fixtures are IC-rated for use in insulated ceilings and meet IECC air leakage requirements. The UL Wet Location listing makes the product a versatile solution for use in areas where water intrusion is likely. These fixtures are designed for easy installation and feature a baffled trim to provide a proper cut-off angle. The Simply Conserve IC-Rated LED Recessed Downlight Series accepts 120-volt AC power supply.











MODEL NUMBER	NOMINAL SIZE	NOMINAL WATTS	VOLTAGE	LUMENS	ССТ	CRI	DIMMING	CASE QTY.	WARRANTY
L9DL630D	6"	9W	120V	700	3000K	≥80	Yes	12	5 year

SIMPLY**C@NSERVE**®

Simply Conserve® Adjustable Wafer Downlight

Simply Conserve's field-adjustable wafer downlight provides the same installation benefits as standard wafers but includes field adjustability of color temperature from 2700K to 5000K, simplifying SKUs. The downlight can be easily installed in new construction, remodel, and retrofit projects. Wet-location rating allows the light to be used outdoors as well as indoors.











MODEL NUMBER	NOMINAL SIZE	NOMINAL WATTS	VOLTAGE	LUMENS	сст	CRI	DIMMING	CASE QTY.	WARRANTY
L12-DLR6-27/50- D-ADJ	6"	12W	120V	950	27/30/35/40/50K	>80	Yes	16	5 year

SIMPLY CONSERVE®

Simply Conserve[®] Field-Adjustable Commercial Downlight

The Simply Conserve® field-adjustable commercial downlight includes two switches on the unit which allow for adjustment of the input power, lumen output, and color temperature of 3000K/3500K/4000K. This downlight allows for easy installation in new construction, remodel and retrofit projects. Its 90+ CRI and frosted lens allow for true color rendering for vivid colors throughout, and glare-free lighting makes it ideal for commercial use in retail spaces, hospitals, offices, and airports.













MODEL NUMBER	NOMINAL SIZE	NOMINAL WATTS	VOLTAGE	LUMENS	сст	CRI	DIMMING	CASE QTY.	WARRANTY
L7/18-DL6/35/50- D-ADJ	5.13" x 6.25" x 8.24"	7/10/18W	120-277V	700/1000/ 1500	30/35/40K	<u>≥</u> 90	0-10V	4	5 year
L10/22-DL8- 35/50-D-ADJ	5.86" x 7.86" x 10.25"	10/15/22W	120-277V	1000/1500/ 2000	30/35/40K	<u>≥</u> 90	0-10V	4	5 year

Wall Packs



SIMPLY CONSERVE®

Simply Conserve® Mini Wall Pack

The Mini Wall Pack is a great choice for adding or upgrading outdoor security lighting. It's ideal for garages, loading bays, multifamily complexes, hospitality, and office buildings. The integrated photocell allows for dusk-to-dawn operation out of the box. This fixture can withstand exterior elements.





MODEL NUMBER	NOMINAL SIZE	NOMINAL WATTS	VOLTAGE	LUMENS	ССТ	CRI	DIMMING	CASE QTY.	WARRANTY
L15-MWP-40-120- PC	11.4" × 7.7" × 1.6"	15W	120V	1050	4000K	>80	No	10	5 year

SIMPLY CONSERVE®

Simply Conserve® LED Wall Pack

Our LED Wall Pack with Photocell provides even, bright lighting for outdoor settings. It is the ideal energy-efficient solution for public spaces, schools, hospitals, parking garages, outdoor walkways and more. With construction that prevents light pollution, saves energy and results in lower maintenance costs, outdoor spaces remain reliably lit for less cost over time.









MODEL NUMBER	NOMINAL SIZE	NOMINAL WATTS	VOLTAGE	LUMENS	ССТ	CRI	DIMMING	CASE QTY.	WARRANTY
L35WPT50F-PC	14.3" X 9.2" X 8"	35W	100-277V	4550	5000K	≥80	No	1	5 year
L50WPT50F-PC	14.3" X 9.2" X 8"	50W	100-277V	5000	5000K	≥81	No	1	5 year
L80WPT50F-PC	14.3" X 9.2" X 8"	80W	100-277V	4550	8000K	<u>></u> 82	No	1	5 year

SIMPLY CONSERVE®



Simply Conserve® Wall Pack Photocell Switch

The Wall Pack Photocell Switch automatically adjusts lighting based on sunlight exposure. Effortlessly and reliably control street lighting, passage lighting, doorway lighting and more without lifting a finger. With a wide voltage range, the switch is broadly applicable for almost any power supply level. The 3-10-second time delay prevents unnecessary lighting adjustment affected by rapidly changing conditions. Eliminate waste by only operating your wall packs when necessary with our UL-listed Wall Pack Photocell Switch.

WALL PACK PHOTOCELL SWITCH ACCESSORIES	CASE QTY.
Locknut	1
O-Ring Gasket	1
Alternative Flat Gasket	1

LAMPS

PL Lamps

SIMPLY CONSERVE®

Simply Conserve® LED PL Lamps

Our plug-and-play vertical and horizontal PL lamps offer simple and efficient lighting solutions for task lighting. Their shatter-resistant, mercury-free design delivers exceptionable durability and their white light efficiently illuminates commercial spaces. A 50,000-hour lifespan means less bulb replacement, and DLC certification guarantees energy and money savings.









MODEL NUMBER	BASE	NOMINAL WATTS	VOLTAGE	LUMENS	ССТ	CRI	DIMMING	CASE QTY.	WARRANTY
L9PL40G24QH	G24q/GX24q	9W	120-277V	800	4000K	≥80	No	60	5 year
L9PL50G24QH	G24q/GX24q	9W	120-277V	800	5000K	<u>≥</u> 80	No	60	5 year
L12PL40G24QH	G24q/GX24q	12W	120-277V	1100	4000K	>80	No	60	5 year
L12PL50G24QH	G24q/GX24q	12W	120-277V	1100	5000K	≥80	No	60	5 year
L12PL40G24QV	G24q/GX24q	12W	120-277V	1200	4000K	<u>≥</u> 80	No	60	5 year
L12PL50G24QV	G24q/GX24q	12W	120-277V	1200	5000K	<u>≥</u> 80	No	60	5 year
L12PL40G24DH	G24q/GX24q	12W	120-277V	1200	4000K	<u>></u> 80	No	60	5 year
L12PL50G24DH	G24q/GX24q	12W	120-277V	1200	5000K	≥80	No	60	5 year
L12PL40G24DH	G24D	12W	120-277V	1200	4000K	≥80	No	60	5 year
L12PL50G24DH	G24D	12W	120-277V	1200	5000K	≥80	No	60	5 year
L12PL40G24DV	G24D	12W	120-277V	1200	4000K	<u>></u> 80	No	60	5 year
L12PL50G24DV	G24D	12W	120-277V	1200	5000K	<u>≥</u> 80	No	60	5 year
L9PL40GX23-2H	GX23-2	9W	120-277V	800	4000K	≥80	No	60	5 year
L9PL50GX23-2H	GX23-2	9W	120-277V	800	5000K	≥80	No	60	5 year

Corn Bulbs



SIMPIY**C@NSERVE**®

Simply Conserve® LED Corn Bulb

With a variety of available sizes and wattages, Simply Conserve's LED Corn Bulb selection is ready to meet your customers' unique needs. Ideal for commercial spaces, whether it be for indoor high-bay or outdoor fixtures, these bulbs provide ideal brightness and weather-resistant construction to keep them shining year-round.







MODEL NUMBER	NOMINAL SIZE	BASE	NOMINAL WATTS	VOLTAGE	LUMENS	ССТ	CRI	DIMMING	CASE QTY.	WARRANTY
L36CB50E26	7.9" x 3.8"	EX26	36W	120-277V	5220	5000K	≥80	No	12	5 year
L54CB50EX39	9.8" x 3.8"	EX39	54W	120-277V	7830	5000K	≥80	No	12	5 year
L120C- B50EX39	12.3" x 4.9"	EX39	120W	120-277V	16800	5000K	<u>></u> 80	No	6	5 year

T8 Lamps



Simply Conserve® T8 LED Hybrid



Simply Conserve's 14W hybrid T8 LED lamp is ideal for offices, conference rooms, hotels, academic complexes, commercial, and medical facilities. Designed to deliver 1,800 lumens, these lamps deliver the same light output as a 32W fluorescent with less than half the power. Hybrid technology reduces maintenance expenses and allows multiple installation methods whether a ballast is present or not. Install as a plug-and-play solution on compatible ballasts, or bypass the ballast to install in a double-end configuration.









MODEL NUMBER	NOMINAL SIZE	NOMINAL WATTS	VOLTAGE	LUMENS	ССТ	CRI	DIMMING	CASE QTY.	WARRANTY
L14T8G35AB	47.7" × 1"	14W	120-277V	1800	3500K	>80	No	25	5 year
L14T8G40AB	47.7" × 1"	14W	120-277V	1800	4000K	>80	No	25	5 year
L14T8G50AB	47.7" × 1"	14W	120-277V	1800	5000K	>80	No	25	5 year
L14T8G40AB-10PK	47.7" × 1"	14W	120-277V	1800	4000K	>80	No	10	5 year
L14T8G50AB-10PK	47.7" × 1"	14W	120-277V	1800	5000K	>80	No	10	5 year

Simply Conserve® LED T8 – UL Type A – Direct Replacement

This LED T8 lamp is a perfect plug-and-play solution to convert existing fluorescent fixtures to LED. Designed to deliver 1800 lumens, these lamps produce the same light output as a 32W fluorescent with less than half the power. The glass construction provides a strong, quick, and safe installation without any re-wiring of the ballast or fixture. Compatible with most electronic instant-start and programmed rapid start T8 ballasts.









MODEL NUMBER	NOMINAL SIZE	NOMINAL WATTS	VOLTAGE	LUMENS	ССТ	CRI	DIMMING	CASE QTY.	WARRANTY
L12T8G40A	G13	12W	120V	1800 <u>+</u> 10%	4000K	>83	No	25	5 year
L12T8G50A	G13	12W	120V	1800 ± 10%	5000K	>83	No	25	5 year
L14T8PC35A	G13	14W	120-277V	1900	3500K	>80	No	30	5 year
L14T8PC40A	G13	14W	120-277V	1900	4000K	>80	No	10	5 year
L14T8PC50A	G13	14W	120-277V	1900	5000K	>80	No	30	5 year
L14T8N35A	G13	14W	120-277V	1900	3500K	>80	No	30	5 year
L14T8N40A	G13	14W	120-277V	1900	4000K	>80	No	30	5 year
L14T8N50A	G13	14W	120-277V	1900	5000K	>80	No	30	5 year
L15T8G40A	G13	15W	120-277V	2200	4000K	>80	No	25	5 year
L15T8G50A	G13	15W	120-277V	2200	5000K	>80	No	25	5 year

SIMPLY CONSERVE®

Simply Conserve® LED T8 – UL Type B – Double-End Ballast Bypass

T8 LEDs provide cost-effective, powerful, uniform lighting for T8 fluorescent retrofit projects utilizing standard G13 (medium bi-pin) sockets. They are used in conjunction with the existing fluorescent housing or fixture bodies. These T8 lamps are equipped with a dedicated internal driver to deliver appropriate light levels for your application. These commercial LED lighting products are great for offices, retail spaces, schools, universities, airport lounges, government facilities and many other common indoor applications.









MODEL NUMBER	BASE	NOMINAL WATTS	VOLTAGE	LUMENS	ССТ	CRI	DIMMING	CASE QTY.	WARRANTY
L14T8G40BDE	G13	14W	120-277V	1800 <u>+</u> 10%	4000K	>83	No	25	5 year
L14T8G50BDE	G13	14W	120-277V	1800 ± 10%	5000K	>83	No	25	5 year
L17T8G40BDE	G13	17W	120-277V	2200 <u>+</u> 10%	4000K	>83	No	25	5 year
L17T8G50BDE	G13	17W	120-277V	2200 ± 10%	5000K	>83	No	25	5 year

T5 Lamps





Simply Conserve® LED T5 – UL Type A – Direct Replacement

This LED T5 lamp is an easy plug-and-play solution to convert existing linear fluorescent fixtures to LED without any extra effort or re-wiring. Designed to deliver over 3500 lumens, the lamp's construction provides safe installation utilizing the existing T5HO Program start electronic ballasts, minimizing maintenance and labor costs.







MODEL NUMBER	BASE	NOMINAL WATTS	VOLTAGE	LUMENS	ССТ	CRI	DIMMING	CASE QTY.	WARRANTY
L25T5G40A	Miniature Bi-Pin	25W	120-277V	3500	4000K	>80	No	25	5 year
L25T5G50A	Miniature Bi-Pin	25W	120-277V	3500	5000K	>80	No	25	5 year

SIMPLY CONSERVE®

Simply Conserve® LED T5 – UL Type B – Bypass



The LED T5 Bypass eliminates the need for a ballast, making it a quick and efficient solution for your lighting needs. With an even and flicker-free light output, this lamp is the ideal replacement for 54-watt T5HO fluorescent tubes in commercial spaces. Its 50,000-hour rated lifespan and easy installation eliminate the hassle of complicated upgrades.







MODEL NUMBER	BASE	NOMINAL WATTS	VOLTAGE	LUMENS	ССТ	CRI	DIMMING	CASE QTY.	WARRANTY
L25T5G40BDE	G5	25W	120-277V	3500	4000K	>80	No	25	5 year
L25T5G50BDE	G5	25W	120-277V	3500	5000K	>80	No	25	5 year

LED T8 and T5 Product Selection

FAMILY	WATTAGE	LAMP TYPE	MATERIAL	сст	OPERATION
L = LED Linear	12 = 12W 14 = 14W 15 = 15W	T8 = T8 Tube T5 = T5 Tube	G = Glass PC = Aluminum & Polycarbonate N = Nano Plastic	35 = 3500K 40 = 4000K 50 = 5000K	A = UL Type A BDE = UL Type B, Double End BSE = UL TYPE B, Single End AB = UL Type A/B, Dual Mode

Lighting

Partner Brands


































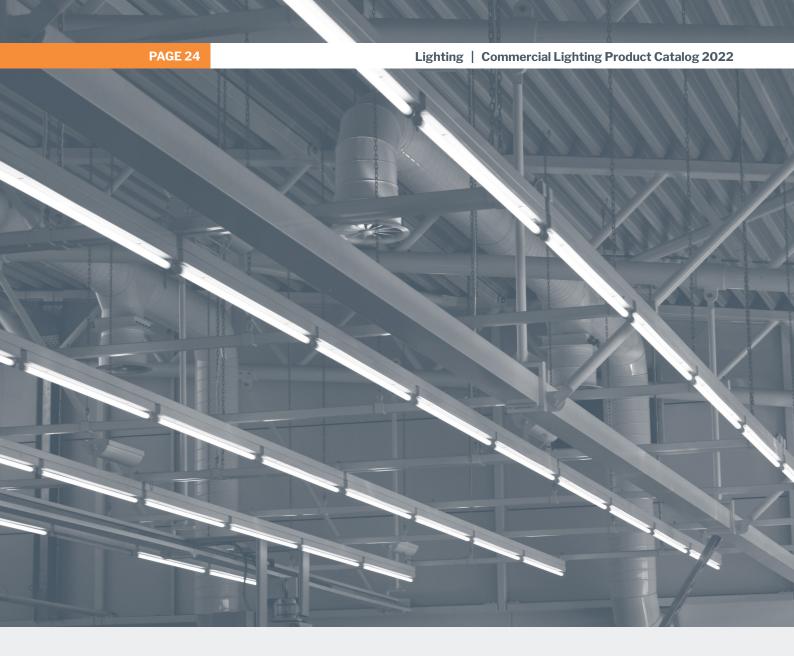

















AM Conservation

1701 Charleston Regional Parkway Suite A Charleston, SC 29492 USA

Phone: 843.410.4137 Fax: 843.971.1472

Email: customercare@amconservationgroup.com

